


Mått tabell hydraulcylindrar med ledlager

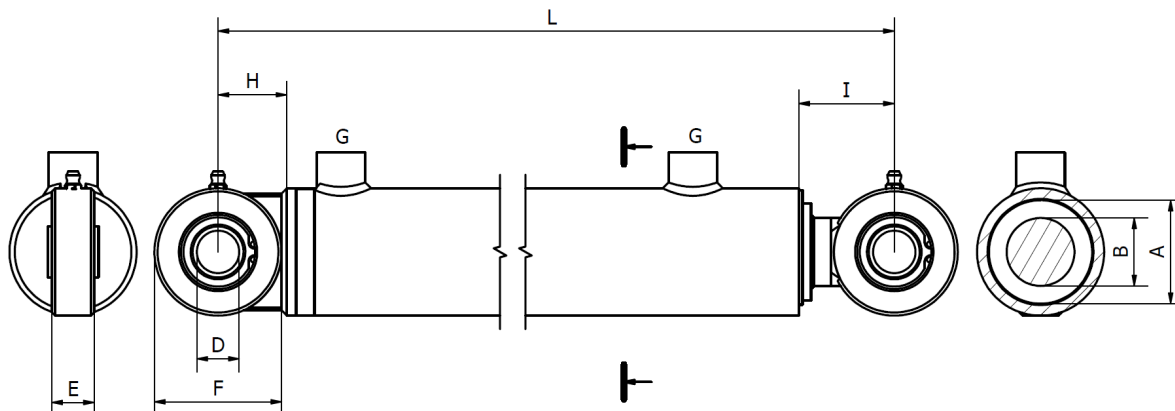

A	B	L	D	E	F	G	H	I
Cylinder Diameter	Kolvstångs Diameter	Inbyggnads Mått C-C	Ledlager hål	Ledlager bredd	LL fäste Diameter	Anslutning		
25	16	99	10	9	32	1/4"	16	21
35	25	135	12	12	45	1/4"	22,5	33
40	25	172	20	20	55	3/8"	27,5	50
50	25	185	20	20	60	3/8"	30	48
50	30	190	25	30	62	3/8"	31	53
50	32	185	20	20	60	3/8"	30	48
63	32	208	25	30	62	1/2"	31	56
63	40	208	25	30	62	1/2"	31	56
70	40	224	30	30	70	1/2"	35	73
70	50	224	30	30	70	1/2"	35	73
80	40	235	35	35	85	1/2"	42,5	76
80	50	235	35	35	85	1/2"	42,5	76
100	50	271	40	50	89	1/2"	44,5	93
120	60	302	50	40	112	1/2"	52,5	105

Kalldragna Cylinderör HPS/RTU

Material:	E355 +C motsvarar St 52-3 BK
Tolerans:	YD Enl. EN 10305-2, ID H9-H10
Ra värde:	0,4 my max
Rakhet:	0,7 m pro 1000 mm